

DAFTAR LAMPIRAN

Lampiran- 1 Program alat

1. rangkaian pengirim (TX)

```
/*  
  
Nano   UART-LoRa  
  
D3     -> TXD  
  
D4     -> RXD  
  
NC     -> AUX  
  
5V     -> VCC  
  
GND    -> GND  
  
*/  
  
#include <SoftwareSerial.h>  
  
SoftwareSerial loraSerial(3,4); //3->TX_Lora  
  
#include "GravityTDS.h"  
  
#define pHSensor A1 //pH meter Analog output  
  
#define tbdSensor A3  
  
#define tdsSensor A5  
  
#define Offset 0.00 //deviation compensate  
  
#define LED 13  
  
#define samplingInterval 20  
  
#define printInterval 2000 //800  
  
#define ArrayLength 40 //times of collection  
  
#define VREF 5.0 // analog reference voltage(Volt) of the ADC  
  
#define SCOUNT 30 // sum of sample point  
  
int analogBuffer[SCOUNT]; // store the analog value in the  
array, read from ADC  
  
int analogBufferTemp[SCOUNT];  
  
int analogBufferIndex = 0,copyIndex = 0;  
  
int pHArray[ArrayLength]; //Store the average value of the  
sensor feedback
```

```

int pHArrayIndex=0;

float pHValue, volt, ntu, IP;

GravityTDS gravityTds;

float averageVoltage = 0,tdsValue = 0,temperature = 25;

String sPH, sTDS, sNTU, sIP, KTG;

String CTx="C1";

String dataTX= ""; //data kirim

String dataRX=""; //data terima

int counter = 0; //Lora initialization counter

unsigned int readingID = 0; //packet counter

int periodaData=3000; //mdet.

void setup() {

    Serial.begin(9600);

    startLoRA();

    gravityTds.setPin(tdsSensor);

    gravityTds.setAref(5.0); //reference voltage on ADC, default
5.0V on Arduino UNO

    gravityTds.setAdcRange(1024); //1024 for 10bit ADC;4096 for
12bit ADC

    gravityTds.begin(); //initialization
}

void loop() {

    Ph();

    Turbidity();

    TDS();

    indeksP();

    kirimData();

}

void Ph() {

    static unsigned long samplingTime = millis();

    static unsigned long printTime = millis();

    static float pHValue,voltage;

    if(millis()-samplingTime > samplingInterval){

```

```

        pHArray[pHArrayIndex++]=analogRead(pHSensor);
        if(pHArrayIndex==ArrayLength)pHArrayIndex=0;
        voltage = avergearray(pHArray, ArrayLength)*5.0/1024;
        pHValue = 3.5*voltage+Offset;
        samplingTime=millis();
    }
    if(millis() - printTime > printInterval){
        sPH = String(pHValue,1);
        sNTU = String(ntu,0);
        sTDS = String(tdsValue,1);
        sIP = String(IP,2);
        Serial.println(" pH value: "+ sPH);
        Serial.println(" ntu : "+ sNTU);
        Serial.println(" tds : "+ sTDS+ " ppm");
        Serial.println(" IP : "+ sIP);
        Serial.println();
        digitalWrite(LED,digitalRead(LED)^1); //ubah status LED
        printTime=millis();
    }
}

double avergearray(int* arr, int number){
    int i,max,min;
    double avg;
    long amount=0;
    if(number<=0){
        Serial.println("Error number for the array to avraging!/n");
        return 0;
    }
    if(number<5){ //less than 5, calculated directly statistics
        for(i=0;i<number;i++) { amount+=arr[i]; }
        avg = amount/number;
        return avg;
    }
}

```

```

}else{
    if(arr[0]<arr[1]){ min = arr[0];max=arr[1]; }
    else{ min=arr[1];max=arr[0]; }
    for(i=2;i<number;i++){
        if(arr[i]<min){
            amount+=min; //arr<min
            min=arr[i];
        }else {
            if(arr[i]>max){
                amount+=max; //arr>max
                max=arr[i];
            }else{
                amount+=arr[i]; //min<=arr<=max
            }
        }
    }
    avg = (double)amount/(number-2);
}

void Turbidity() {
    volt = 0;
    for(int i=0; i<800; i++){
        volt += ((float)analogRead(tbdSensor)/1023)*5;
    }
    volt = volt/800;
    volt = round_to_dp(volt,2);
    if(volt < 2.5) ntu = 3000;
    else ntu = -1120.4*square(volt)+5742.3*volt-4353.8;
    // Serial.println(" ntu : "+String(ntu,2));
}

float round_to_dp( float in_value, int decimal_place ){

```

```

float multiplier = powf( 10.0f, decimal_place );
in_value = roundf( in_value * multiplier ) / multiplier;
return in_value;
}

void TDS() {
    static unsigned long analogSampleTimepoint = millis();
    //every 40 milliseconds, read the analog value from the ADC
    if(millis()-analogSampleTimepoint > 40U) {
        analogSampleTimepoint = millis();
        //read the analog value and store into the buffer
        analogBuffer[analogBufferIndex] = analogRead(tdsSensor);
        analogBufferIndex++;
        if(analogBufferIndex == SCOUNT) analogBufferIndex = 0;
    }

    static unsigned long printTimepoint = millis();
    if(millis()-printTimepoint > 800U){
        printTimepoint = millis();
        for(copyIndex=0; copyIndex<SCOUNT; copyIndex++){
            analogBufferTemp[copyIndex]= analogBuffer[copyIndex];

            averageVoltage = getMedianNum(analogBufferTemp, SCOUNT) *
(float)VREF / 1024.0; // read the analog value more stable by the
median filtering algorithm, and convert to voltage value

            float compensationCoefficient=1.0+0.02*(temperature-25.0);
//temperature compensation formula: fFinalResult(25^C) =
fFinalResult(current) / (1.0+0.02*(fTP-25.0));

            float
compensationVolatge=averageVoltage/compensationCoefficient;
//temperature compensation

tdsValue=(133.42*compensationVolatge*compensationVolatge*compensat
ionVolatge -
                255.86*compensationVolatge*compensationVolatge +
857.39*compensationVolatge)*0.5; //convert voltage value to tds
value

        //Serial.print("voltage:");
        //Serial.print(averageVoltage, 2);

```

```

        //Serial.print("V   ");
        //Serial.println(" TDS Value   : "+String(tdsValue,3)+ "
ppm");

        delay(1000);

    }

}

int getMedianNum(int bArray[], int iFilterLen) {
    int bTab[iFilterLen];

    for (byte i = 0; i<iFilterLen; i++)
        bTab[i] = bArray[i];

    int i, j, bTemp;

    for (j = 0; j < iFilterLen - 1; j++){
        for (i = 0; i < iFilterLen - j - 1; i++) {
            if(bTab[i] > bTab[i + 1]){
                bTemp = bTab[i];
                bTab[i] = bTab[i + 1];
                bTab[i + 1] = bTemp;
            }
        }
    }

    if ((iFilterLen & 1)>0) bTemp = bTab[(iFilterLen-1)/2];
    else bTemp = (bTab[iFilterLen/2] + bTab[iFilterLen/2-1])/ 2;

    return bTemp;
}

void indeksP() {
    float Ph = pHValue/7.5;
    float tds = tdsValue/1000;
    float ntuValue = ntu/3000;
    float jumlah = Ph + tds + ntuValue;
    float rerata = jumlah/3;
    float maks1 = max(Ph, tds);
    float maks2 = max(maks1, ntuValue);

```

```

IP = sqrt((((sq(jumlah)) * maks2) + ((sq(jumlah)) * rerata))/2);
//Serial.println(" IP : "+String(IP,4));
if(IP<=1.0) KTG="(Baik)";
else if(IP>1.0 && IP<=5.0) KTG="( CR )"; //Cemar Ringan
else if(IP>5.0 && IP<=10.0) KTG="( CS )"; //Cemar Sedang
else if(IP>10.0) KTG="( CB )"; //Cemar Berat
}

void kirimData() {
    dataTX = CTx+'~'+sPH+'#'+sNTU+'$'+sTDS+'%'+sIP+'&'+KTG+'*';
    loraSerial.print(dataTX); //Kirimkan ke receiver
    Serial.println("Baru Kirim : "+dataTX);
    Serial.println();
    delay(periodaData);
}

//Initialize LoRa module
void startLoRA(){
    loraSerial.begin(9600);
    while (!loraSerial && counter < 10) {
        Serial.print(".");
        counter++; delay(100);
    }
    if(counter==10) {
        readingID++;
        Serial.println("Starting LoRa failed!");
    }
    Serial.println("LoRa Initialization OK!");
    delay(3000);
}

```

2. Rangkaian penerima(RX)

```

/*Gunakan ESP32 Dev Module

LoraUART  ESP32

```

```

M0          GND
M1          GND
TX          RX2
RX          TX2
VCC         5V
GND         GND
*/
#include <WiFi.h>
#include <AsyncTCP.h>
#include <SPIFFS.h>
#include <ESPAsyncWebServer.h>
#include <LiquidCrystal_I2C.h>
LiquidCrystal_I2C lcd(0x27, 20, 4);
//Switch pin
#define SW 14
bool ubahDisplay = 0;
const char* ssid    = "Asharullah-AP";
const char* password = "123456789";
IPAddress IP;
String sPH, sTDS, sNTU, sIP, KTG;
String CNum="C1", CRX;
String dataRX=""; //data terima
float nIP;
int counter = 0; //Lora initialization counter
unsigned int readingID = 0; //packet counter
unsigned long lastT1=0, previousT1=0, limitT1=5000;

// Create AsyncWebServer object on port 80
AsyncWebServer server(80);
String processor(const String& var) {
    if (var == "PH") {return sPH;}
    else if (var == "TDS") {return sTDS;}

```



```

        else if (var == "NTU") {return sNTU;}
        else if (var == "IP") {return sIP;}
        else if (var == "KAT") {return KTG;}
        return String();
    }
void setup() {
    Serial.begin(9600);
    pinMode(SW, INPUT_PULLUP);
    startLCD();
    startLoRA();
    startAccesPoint();
    startWEB();
}
void startLCD() {
    lcd.init(); lcd.backlight();
    intro();
    delay(1000);
}
void intro() {
    lcd.setCursor(0,0);  lcd.print(F("LORA WEBSERVER"));
    lcd.setCursor(0,1);  lcd.print(F("pH : "));
    lcd.setCursor(10,1); lcd.print(F("TDS: "));
    lcd.setCursor(0,2);  lcd.print(F("ntu: "));
    lcd.setCursor(0,3);  lcd.print(F("IP : "));
}
void startLoRA(){
    Serial2.begin(9600);
    while (!Serial2 && counter < 10) {
        Serial.print("."); counter++; delay(100);
    }
    if(counter==10) {
        readingID++;
    }
}

```

```

        Serial.println("Starting LoRa failed!");
    }

    Serial.println("LoRa Initialization OK!");
    delay(1000);
}

void loop() {
    terimaData();

    if(digitalRead(SW)==1) {
        if(ubahDisplay) {ubahDisplay=0; intro();}

        displayData();
    }

    else displayIP();

    IP = WiFi.softAPIP();

    Serial.print("AP IP address: http://"); Serial.println(IP);
}

void terimaData() {
    if(Serial2.available()>0) {
        dataRX = Serial2.readStringUntil('*'); // Read packet
        //dataRX = CNum+'~'+sPH+'#'+sNTU+'$'+sTDS+'%'+sIP+'&'+KTG+'*';
        Serial.print(F("Baru Terima : ")); Serial.println(dataRX);
        previousT1=millis();

        int pos1 = dataRX.indexOf('~');
        int pos2 = dataRX.indexOf('#');
        int pos3 = dataRX.indexOf('$');
        int pos4 = dataRX.indexOf('%');
        int pos5 = dataRX.indexOf('&');
        int pos6 = dataRX.indexOf('*');

        CNum = dataRX.substring(0, pos1);

        if(CNum == "C1") {
            sPH = dataRX.substring(pos1+1, pos2);
            sNTU = dataRX.substring(pos2+1, pos3);
            sTDS = dataRX.substring(pos3+1, pos4);

```

```

        sIP = dataRX.substring(pos4+1, pos5);
        KTG = dataRX.substring(pos5+1, pos6);
    }

    Serial2.readStringUntil(' '); //kosongkan buffer
}

else {
    lastT1=millis();
    if(lastT1-previousT1>limitT1) {
        sPH = "--- ";
        sNTU = "--- ";
        sTDS = "--- ";
        sIP = "--- ";
        KTG = "    ";

        Serial.println(F("Tidak Menerima DATA! \n"));
    }
}

}

}

void startAccesPoint() {
    // Initialize SPIFFS
    if(!SPIFFS.begin()){
        Serial.println("Mounting SPIFFS Error");
        return;
    }

    //===== Set as an ACCES POINT
    =====

    Serial.print("Setting AP (Access Point)...");
    WiFi.softAP(ssid, password);
    IP = WiFi.softAPIP();
    Serial.print("AP IP address: http://"); Serial.println(IP);
    delay(5000);
}

void displayIP() {

```

```

    lcd.setCursor(0,0); lcd.print("                ");
    lcd.setCursor(0,1); lcd.print("Alamat WebServer : ");
    lcd.setCursor(0,2); lcd.print("http://"); lcd.print(IP);
    lcd.setCursor(0,3); lcd.print("                ");
    ubahDisplay = 1;
}

void displayData() {
    lcd.setCursor(5,1); lcd.print(F("        "));
    lcd.setCursor(15,1); lcd.print(F("        "));
    lcd.setCursor(5,2); lcd.print(F("                "));
    lcd.setCursor(5,3); lcd.print(F("        "));
    lcd.setCursor(10,3); lcd.print(F("        "));
    lcd.setCursor(5,1); lcd.print(sPH);
    lcd.setCursor(15,1); lcd.print(sTDS);
    lcd.setCursor(5,2); lcd.print(sNTU);
    lcd.setCursor(5,3); lcd.print(sIP);
    lcd.setCursor(10,3); lcd.print(KTG);
    Serial.println("pH = "+sPH+"    TDS = "+sTDS+"    NTU = "+sNTU);
    Serial.println("IP = "+sIP+KTG+"\n");
    delay(1000);
}

void startWEB() {
    if (!SPIFFS.begin()) {
        Serial.println("An Error has occurred while mounting SPIFFS");
        return;
    }

    // Route for root / web page
    server.on("/", HTTP_GET, [] (AsyncWebServerRequest * request) {
        request->send(SPIFFS, "/index.html", String(), false,
processor);

    });

    // Route to load style.css file

```

```

server.on("/style.css", HTTP_GET, [] (AsyncWebServerRequest *
request) {

    request->send(SPIFFS, "/style.css", "text/css");

});

//===== tampilkan image
=====

server.on("/bgimage.jpg", HTTP_GET, [] (AsyncWebServerRequest *
request) {

    request->send(SPIFFS, "/bgimage.jpg", "image/jpg");

});

//===== Data Sensor
=====

server.on("/sPH", HTTP_GET, [] (AsyncWebServerRequest * request)
{

    request->send_P(200, "text/plain", sPH.c_str());

});

server.on("/sTDS", HTTP_GET, [] (AsyncWebServerRequest * request)
{

    request->send_P(200, "text/plain", sTDS.c_str());

});

server.on("/sNTU", HTTP_GET, [] (AsyncWebServerRequest * request)
{

    request->send_P(200, "text/plain", sNTU.c_str());

});

server.on("/sIP", HTTP_GET, [] (AsyncWebServerRequest * request)
{

    request->send_P(200, "text/plain", sIP.c_str());

});

server.on("/KTG", HTTP_GET, [] (AsyncWebServerRequest * request)
{

    request->send_P(200, "text/plain", KTG.c_str());

});

//=====
=

// Start server



server.begin();


```

}

Lampiran- 2 Alat penelitian



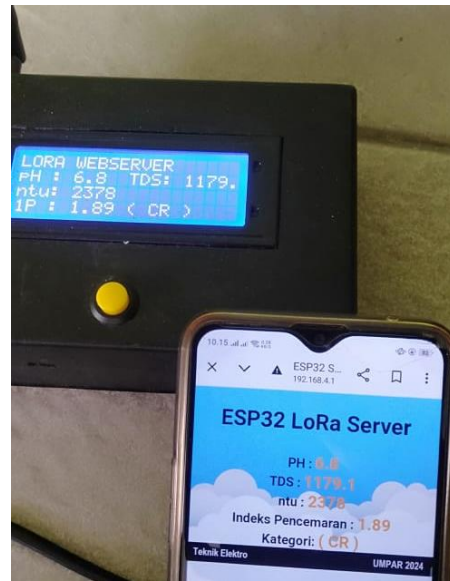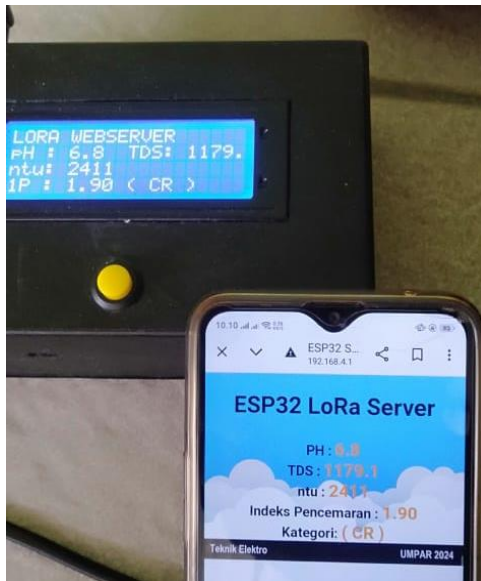

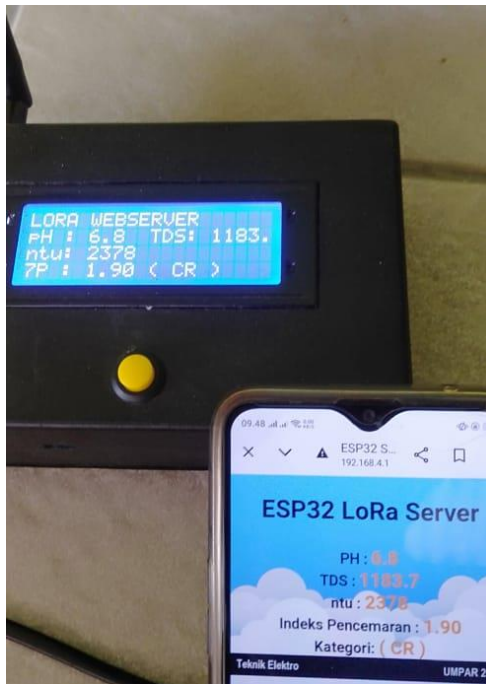



Lampiran- 3 Datasheet

1. Sensor pH

07/12/2014 PH meter(SKU: SEN0161) - Robot Wiki

PH meter(SKU: SEN0161)

From Robot Wiki



Analog pH Meter Kit

Introduction

Need to measure water quality and other parameters but haven't got any low cost pH meter? Find it difficult to use with Arduino?

Here comes an analog pH meter, specially designed for Arduino controllers and has built-in simple, convenient and practical connection and features. It has an LED which works as the Power Indicator, a BNC connector and PH2.0 sensor interface. To use it, just connect the pH sensor with BNC connector, and plug the PH2.0 interface into the analog input port of any Arduino controller. If pre-programmed, you will get the pH value easily. Comes in compact plastic box with foams for better mobile storage.

Attention: In order to ensure the accuracy of the pH probe, you need to use the standard solution to calibrate it regularly. Generally, the period is about half a year. If you measure the dirty aqueous solution, you need to increase the frequency of calibration.

Applications

- Water quality testing
- Aquaculture

Specification


- Module Power : 5.00V
- Module Size : 43mm×32mm
- Measuring Range 0-14PH
- Measuring Temperature :0-60 °C

[http://robot.wiki/index.php/PH_meter\(SKU:_SEN0161\)](http://robot.wiki/index.php/PH_meter(SKU:_SEN0161)) 1/6

07/12/2014 PH meter(SKU: SEN0161) - Robot Wiki

- Accuracy : ± 0.1 pH (25 °C)
- Response Time : ≤ 1 min
- pH Sensor with BNC Connector
- PH2.0 Interface (3 foot patch)
- Gain Adjustment Potentiometer
- Power Indicator LED
- Cable Length from sensor to BNC connector:660mm

pH Electrode Size



pH Electrode Characteristics

The output of pH electrode is Millivolts, and the pH value of the relationship is shown as follows (25 °C):

VOLTAGE (mV)	pH value	VOLTAGE (mV)	pH value
414.12	0.00	-414.12	14.00
354.96	1.00	-354.96	13.00
295.80	2.00	-295.80	12.00
236.64	3.00	-236.64	11.00
177.48	4.00	-177.48	10.00
118.32	5.00	-118.32	9.00
59.16	6.00	-59.16	8.00
0.00	7.00	0.00	7.00

2. Sensor *Turbidity*



Turbidity sensor SKU: SEN0189



Contents

- [1 Introduction](#)
- [2 Specification](#)
- [3 Connection Diagram](#)
- [4 Examples](#)

Introduction

The turbidity sensor detects water quality by measuring the levels of turbidity. It uses light to detect suspended particles in water by measuring the light transmittance and scattering rate, which changes with the amount of total suspended solids (TSS) in water. As the TSS increases, the liquid turbidity level increases.

Turbidity sensors are used to measure water quality in rivers and streams, wastewater and effluent measurements, control instrumentation for settling ponds, sediment transport research and laboratory measurements.


This sensor provides analog and digital signal output modes. The threshold is adjustable when in digital signal mode. You can select the mode according to your MCU.



Specification

- Operating Voltage: 5V DC
- Operating Current: 40mA (MAX)
- Response Time : <500ms
- Insulation Resistance: 100M (Min)
- Output Method:
 - Analog output: 0-4.5V
 - Digital Output: High/Low level signal (you can adjust the threshold value by adjusting the potentiometer)
- Operating Temperature: 5°C-90°C
- Storage Temperature: -10°C-90°C
- Weight: 30g
- Adapter Dimensions: 38mm*28mm*10mm/1.5inches *1.1inches*0.4inches

Connection Diagram

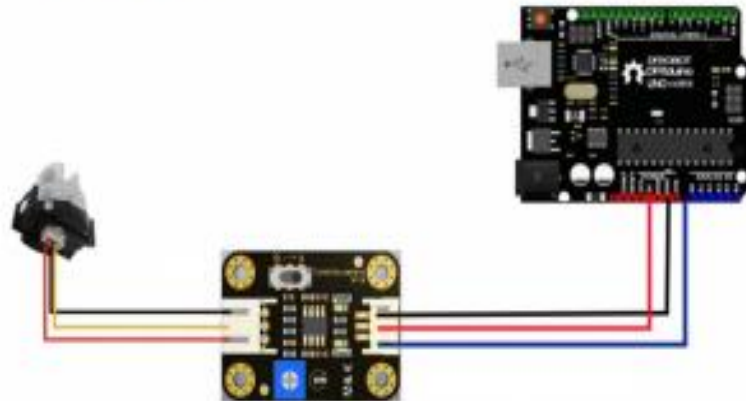

Interface Description:

1. "D/A" Output Signal Switch
1. "A": Analog Signal Output, the output value will decrease when in liquids with a high turbidity
2. "D": Digital Signal Output, high and low levels, which can be adjusted by the threshold potentiometer
2. Threshold Potentiometer: you can change the trigger condition by adjusting the threshold potentiometer in digital signal mode.

Examples

Here are two examples:

Example 1 uses Analog output mode

Example 2 uses Digital output mode

Example 1

```
void setup() {  
    Serial.begin(9600); //Baud rate: 9600  
}  
  
void loop() {  
    int sensorValue = analogRead(A0); // read the input on analog pin 0:  
    float voltage = sensorValue * (5.0 / 1024.0); // Convert the analog reading (which goes from 0 - 1023) to a voltage (0 - 5V):  
    Serial.println(voltage); // print out the value you read:  
    delay(500);  
}
```

Example 2

```
int ledPin = 13;           // Connect an LED on pin 13, or use the on  
                           // board one  
  
int sensorIn = 2;          // Connect turbidity sensor to Digital  
                           // Pin 2
```


```

void setup(){
  pinMode(ledPin, OUTPUT);    // Set ledPin to output mode
  pinMode(sensor_in, INPUT);  //Set the turbidity sensor pin to input
  mode
}

void loop(){
  if(digitalRead(sensor_in)==LOW){    //read sensor signal
    digitalWrite(ledPin, HIGH);    // if sensor is LOW, then turn on
  }else{
    digitalWrite(ledPin, LOW);    // if sensor is HIGH, then turn off
    the led
  }
}

```

This is a reference chart for the mapping from the output voltage to the NTU according to different temperature. e.g. If you leave the sensor in the pure water, that is NTU < 0.5, it should output "4.1±0.3V" when temperature is 10-50°C.

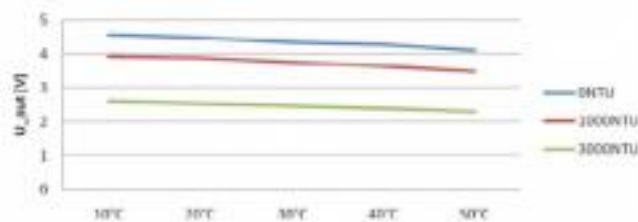

characteristic curve "Voltage —Temperature

Note: In the diagram, the unit measuring turbidity is shown as NTU, also it is known as JTU (Jackson Turbidity Unit), 1JTU = 1NTU = 1 mg/L. Refer to Turbidity wikipedia

3. Sensor TDS



Gravity: Analog TDS Sensor / Meter For Arduino SKU: SEN0244

TDS (Total Dissolved Solids) indicates that how many milligrams of soluble solids dissolved in one liter of water. In general, the higher the TDS value, the more soluble solids dissolved in water, and the less clean the water is. Therefore, the TDS value can be used as one of the references for reflecting the cleanliness of water.

TDS pen is a widely used equipment to measure TDS value. The price is affordable, and it is easy to use, but it is not able to transmit data to the control system for online monitoring to do some water quality analysis. The professional instrument has high accuracy and can send data to the control system, but the price is expensive for the ordinary people. To this end, we have launched an analog TDS sensor kit which is compatible with Arduino, plug and play, easy to use. Matching with Arduino controller, you can build a TDS detector easily to measure the TDS value of liquid.

This product supports 3.3 – 5.5V wide voltage input, and 0 – 2.3V analog voltage output, which makes it compatible with 5V or 3.3V control system or board. The excitation source is AC signal, which can effectively prevent the probe from polarization and prolong the life of the probe, meanwhile, increase the stability of the output signal. The TDS probe is waterproof, it can be immersed in water for long time measurement.

This product can be used in water quality application, such as domestic water, hydroponics. With this product, you can easily DIY a TDS detector to reflect the cleanliness of water to protect your health.




Attention:

- 1.The probe can not be used in water above 55 degrees centigrade.
- 2.The probe can not be left too close to the edge of the container, otherwise it will affect the reading.
- 3.The head and the cable of the probe are waterproof, but the connector and the signal transmitter board are not waterproof. Please be careful.

Specification

- **Signal Transmitter Board**
Input Voltage: 3.3 ~ 5.5V
Output Voltage: 0 ~ 2.3V
Working Current: 3 ~ 6mA
TDS Measurement Range: 0 ~ 1000ppm
TDS Measurement Accuracy: $\pm 10\%$ F.S. (25 °C)
Module Size: 42 * 32mm
Module Interface: PH2.0-3P
Electrode Interface: XH2.54-2P
- **TDS probe**
Number of Needle: 2
Total Length: 83cm
Connection Interface: XH2.54-2P
Colour: Black
Other: Waterproof Probe

Board Overview

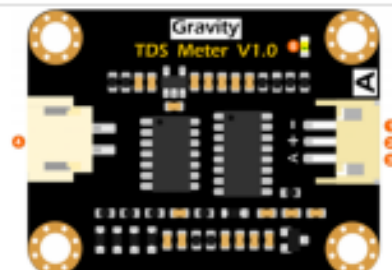

Analog TDS Sensor / Meter For Arduino

Num	Label	Description
1	.	Power GND(0V)
2	+	Power VCC(3.3 ~ 5.5V)
3	A	Analog Signal Output(0 ~ 2.3V)
4	TDS	TDS Probe Connector
5	LED	Power Indicator

Tutorial

This tutorial will show you how to measure the TDS value of the water. Please read this tutorial carefully, and pay attention to the steps and details.



The probe can not to be used in water above 55 degrees centigrade.
 The probe can not be too close to the edge of the container, otherwise it will affect the reading.
 The head and the cable of the probe are waterproof, but the connector and the signal transmitter board are not waterproof. Please pay attention to use.


Requirements

- **Hardware**
 DFRduino UNO R3 (or similar) x 1
 Analog TDS Sensor / Meter Module x 1
 TDS Probe x1
 Jumper Wires x3
 tested liquid x1
- **Software**

Arduino IDE (Version requirements: V1.0.x or V1.8.x), Click to Download Arduino IDE from Arduino®

<https://www.arduino.cc/en/Main/Software%7C>

Connection Diagram

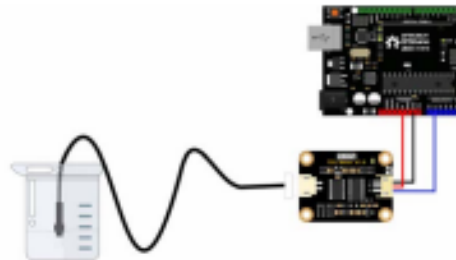

4. Lora



1 Overview

1.1 Product introduction

E32-433T20D is a wireless serial port module (TTL level) based on Semtech's SX1278 radio frequency chip, transparent transmission, working in the 410-441MHz frequency band (default 433MHz), using LoRa spread spectrum technology.

SX1278 supports LoRa spread spectrum technology. LoRa direct sequence spread spectrum technology has the advantages of longer communication distance, strong anti-interference ability, and strong confidentiality. SX1278 is a milestone in the field of low-speed communication, and is favored by people in the industry. The default air rate of this series is 2.4kbps , the transmit power is 20dBm, and the industrial -grade crystal oscillator is used to ensure its stability and consistency, and the accuracy is less than 10ppm, which is generally used in the industry. At present, it has been in stable mass production, and has been widely used in the three-meter industry, Internet of Things transformation, smart furniture and other fields. The module has data encryption and compression functions. The data transmitted by the module in the air is random, and the data interception is meaningless through strict encryption and decryption algorithms. The data compression function has the possibility to reduce the transmission time, reduce the probability of being interfered, and improve reliability and transmission efficiency.

E32-433T20D strictly abides by FCC, CE, CCC and other domestic and foreign design specifications, meets various RF-related certifications, and meets export requirements.



1.2 Features

- Support advanced LoRa modulation , with the advantage of long-distance anti-interference ;
- Under ideal conditions, the communication distance can reach 3kms , and the transmission distance is better than that of traditional G FSK ;
- Support fixed-point transmission, broadcast transmission, channel monitoring;
- Support air wake-up (ultra-low power consumption), suitable for battery applications;
- Support FEC forward error correction to improve communication stability;
- maximum transmit power is 100mW, and the software is multi-level adjustable;
- Support global license-free ISM 433MHz frequency band;
- Support data transmission rate of 0.3k~19.2kbps;
- Support 2.3 ~ 5.5 V power supply, more than 3.3V power supply can ensure the best performance;
- Industrial-grade standard design, support long-term use at -40 ~ + 85 °C ;
- SMA-K interface for easy connection of coaxial cable or external antenna .

1.3 Application scenarios

- Home security alarm and remote keyless entry;
- Smart home and industrial sensors, etc.;
- Wireless alarm security system;
- Building automation solutions;
- Wireless industrial grade remote control;
- Intelligent intelligent agriculture, oilfield solutions;

- healthcare products;
- Advanced Meter Reading Architecture (AMI);
- Automotive industry applications.

2 Specifications

2.1 Limit parameters


The main parameters	performance		Remark
	minimum	maximum value	
Supply voltage (V)	0	5.5	More than 5.2V will permanently burn the module
Blocking power (dBm)	-	-10	The probability of burning at close range is small
Working temperature (°C)	-40	+85	Industrial grade

2.2 Working parameters

The main parameters	performance			Remark
	minimum	Typical value	maximum value	
Working voltage (V)	2.3 _—	3.0	5.5 _—	≥ 3.3 V guaranteed output power
Communication level (V)		3.3 _—		Risk of burnout with 5V TTL
Working temperature (°C)	-40	-	+85	Industrial grade design
Working frequency band (MHz)	410	-	441	Support ISM frequency band, factory default 433MHz
Power consumption	Emission current (mA)	110		Instantaneous power consumption
	Receive current (mA)	14		
	Sleep current (μA)	4		software shutdown
Maximum transmit power (dBm)	19.0 _—	-	20.0 _—	
Receive Sensitivity (dBm)	-144	-146	-147	The air rate is 2.4kbps
Air rate (bps)	0.3k _—	2.4k	19.2k _—	User self-configured


The main parameters	describe	Remark
reference distance	3000m	Clear and open, antenna gain 5dBi, antenna height 2.5m, air rate 2.4kbps
Subcontracting	5.8B tye	The maximum capacity of a single package, it will be automatically sub-packaged when it exceeds.
Cache capacity	5.12B tye	
Modulation	LoRa™	
Communication interface	UART serial port	TTL level
Packaging method	-line	
interface	1* 7 * 2.54mm	
Dimensions	21 * 36mm	
Antenna interface	SMA-K	Characteristic impedance about 50 Ω

3 Mechanical Dimensions and Pin Definition

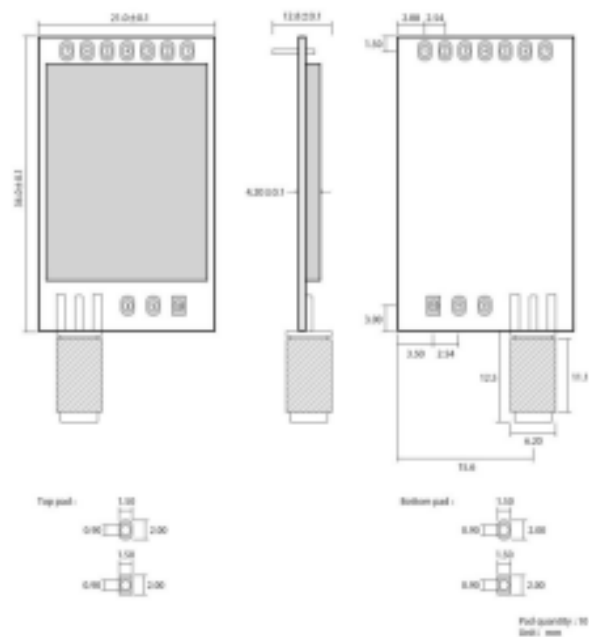

pin number	pin name	Pin Orientation	pin usage
1	M0	Input (very weak pull-up)	Cooperate with M1 to determine the 4 working modes of the module. <i>(Cannot be left floating, can be grounded if not used)</i>
2	M1	Input (very weak pull-up)	Cooperate with M0 to determine 4 working modes of the module. <i>(Cannot be left floating, can be grounded if not used)</i>
3	RXD	enter	TTL serial port input, connected to the external TXD output pin; Can be configured as open-drain or pull-up input, see parameter settings for details.
4	TXD	output	TTL serial output, connected to external RXD input pin; Can be configured as open-drain or push-pull output, see parameter settings for details.
5	AUX	output	Used to indicate the working status of the module; <i>(can be left floating)</i> The user wakes up the external MCU, and outputs a low level during the power-on self-test initialization; It can be configured as open-drain output or push-pull output, see parameter settings for details.
6	VCC	enter	Positive reference for module power supply, voltage range: 2.3 to 5.5 V DC
7	GND	enter	Module ground
8	fixing hole		fixing hole
9	fixing hole		fixing hole
10	fixing hole		fixing hole

4 Recommended Wiring Diagram

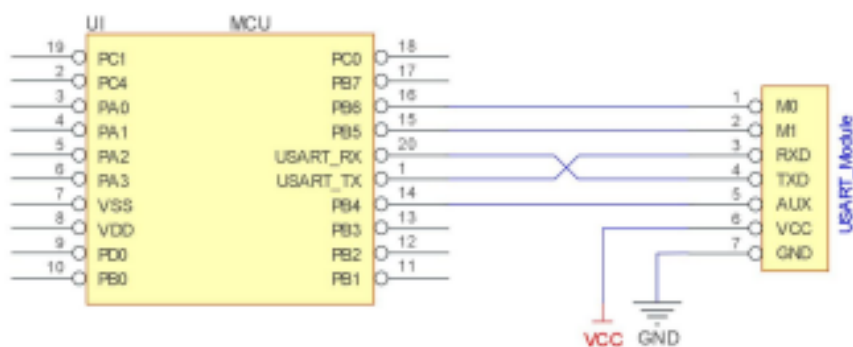

Lampiran- 4 Kartu Monitoring Bimbingan

1. Kartu Monitoring Bimbingan Proposal

 KARTU MONITORING BIMBINGAN MAHASISWA PROGRAM STUDI TEKNIK ELEKTRO FAKULTAS TEKNIK UNIVERSITAS MUHAMMADIYAH PAREPARE			
PROPOSAL			
Mahasiswa : Asharullah		Pembimbing I : A. Irmayani Pawelloi ST., MT.	
NIM : 218180048		Pembimbing II : Muhammad Zainal ST., MT.	
Judul Skripsi : Perancangan Sistem Monitoring Indeks Pencemaran Air di Perairan Parepare berbasis IoT			
ARAHAN PEMBIMBING I	HARI/TGL & PARAF PEMBIMBING	ARAHAN PEMBIMBING II	HARI/TGL & PARAF PEMBIMBING
Konsultasi 1 - Tambahkan Teori sensor PH, TDS, Turbidity.	30/5/2023 A/	Konsultasi 1 1. Tambah parameter pH dan TDS. 2. Teori dasar sensor. 3. Cara kerja sensor.	
Konsultasi 2 - Tambahkan Teori Internet Access, Firewall, Interface Monitoring	A/	Konsultasi 2 3. Di bahas lagi tentang sistem basis.	
Konsultasi 3 Ase / ujian Proposal	5/6/2023 A/	Konsultasi 3 4. Haptes fungsi kirim data ke server.	
Konsultasi 4		Konsultasi 4 Ac. / review.	
Konsultasi 5		Konsultasi 5	

Lanjut ke halaman sebelah...


Perhatian :


1. Mahasiswa wajib konsultasi minimal 5 kali
2. Kartu ini wajib dibawa oleh mahasiswa disetiap konsultasi dan diisi oleh Pembimbing
3. Kartu ini wajib dilampirkan pada laporan skripsi dan menjadi salah satu persyaratan untuk ikut seminar proposal/ujian skripsi
4. Kartu ini dicetak di atas kertas karton A4 berwarna merah muda dan dicetak timbal balik

Lanjutan ...

ARAHAN PEMBIMBING I	HARI/TGL & PARAF PEMBIMBING	ARAHAN PEMBIMBING II	HARI/TGL & PARAF PEMBIMBING
Konsultasi 6		Konsultasi 6	
Konsultasi 7		Konsultasi 7	
Konsultasi 8		Konsultasi 8	
Konsultasi 9		Konsultasi 9	
Konsultasi 10		Konsultasi 10	

Parepare, 6/6/2023.

Mengetahui
Ketua Program Studi

Asrul, ST., MT.
NBM. 986 836

Mahasiswa

Asharullah
NIM. 218180048

Perhatian :

1. Mahasiswa wajib konsultasi minimal 5 kali
2. Kartu ini wajib dibawa oleh mahasiswa disetiap konsultasi dan dilai oleh Pembimbing
3. Kartu ini wajib dilampirkan pada laporan skripsi dan menjadi salah satu persyaratan untuk ikut seminar proposal/ujian skripsi
4. Kartu ini dicetak di atas kertas karton A4 berwarna merah muda dan dicetak timbal balik

2. Kartu Monitoring Bimbingan Skripsi



KARTU MONITORING BIMBINGAN
 MAHASISWA PROGRAM STUDI TEKNIK ELEKTRO
 FAKULTAS TEKNIK
 UNIVERSITAS MUHAMMADIYAH PAREPARE

SKRIPSI

Mahasiswa : ASHARULLAH	Pembimbing I : A. Irmayani Pawellol ST., MT.
NIM : 218180048	Pembimbing II : Muhammad Zainal ST., MT.
Judul Skripsi : PERANCANGAN SISTEM MONITORING INDEKS PENCEMARAN AIR DI PERAIRAN PAREPARE BERBASIS INTERNET OF THINGS (IOT)	

ARAHAN PEMBIMBING I	HARI/TGL & PARAF PEMBIMBING	ARAHAN PEMBIMBING II	HARI/TGL & PARAF PEMBIMBING
Konsultasi 1 ABSTRAK	19/7/2024 Ar	Konsultasi 1 BAB I	/
Konsultasi 2 Perbaiki Kumpulan	21/7/2024 Ar	Konsultasi 2 BAB II	/
Konsultasi 3 Ane	20/7/2024 Ar	Konsultasi 3 BAB III	/
Konsultasi 4 Ane y ujian skripsi	30/7/24 Ar	Konsultasi 4 Bab IV. Tabel 18/bsian dg banyk skripsi epora dan koreksi per bany	/
Konsultasi 5		Konsultasi 5 Ane juringan ke pembimbing I 4/8/24 skripsi	/

Lanjut ke halaman sebelah...

Perhatian :

1. Mahasiswa wajib konsultasi minimal 5 kali
2. Kartu ini wajib dibawa oleh mahasiswa disetiap konsultasi dan diisi oleh Pembimbing
3. Kartu ini wajib dilampirkan pada laporan skripsi dan menjadi salah satu persyaratan untuk ikut seminar proposal/ujian skripsi
4. Kartu ini dicetak di atas kertas karton berwarna hijau muda dan dicetak timbal balik


Lanjutan ...

ARAHAN PEMBIMBING I	HARI/TGL & PARAF PEMBIMBING	ARAHAN PEMBIMBING II	HARI/TGL & PARAF PEMBIMBING
Konsultasi 6		Konsultasi 6	
Konsultasi 7		Konsultasi 7	
Konsultasi 8		Konsultasi 8	
Konsultasi 9		Konsultasi 9	
Konsultasi 10		Konsultasi 10	


Parepare, 15 Juli 2024

Mengetahui

Ketua Program Studi


Astrul, ST., MT.
NBM.986836

Mahasiswa


ASHARULLAH
NIM. 218180048

Perhatian :

1. Mahasiswa wajib konsultasi minimal 5 kali
2. Kartu ini wajib dibawa oleh mahasiswa setiap konsultasi dan diisi oleh Pembimbing
3. Kartu ini wajib dilampirkan pada laporan skripsi dan menjadi salah satu persyaratan untuk ikut seminar proposal/ujian skripsi
4. Kartu ini dicetak di atas kertas karton berwarna hijau muda dan dicetak timbal balik

